




User Manual


For **Endless Serial** - **PIR** Sensor Switch

Product Range: **ED-PC-01**

Dimension Diagram unit: mm

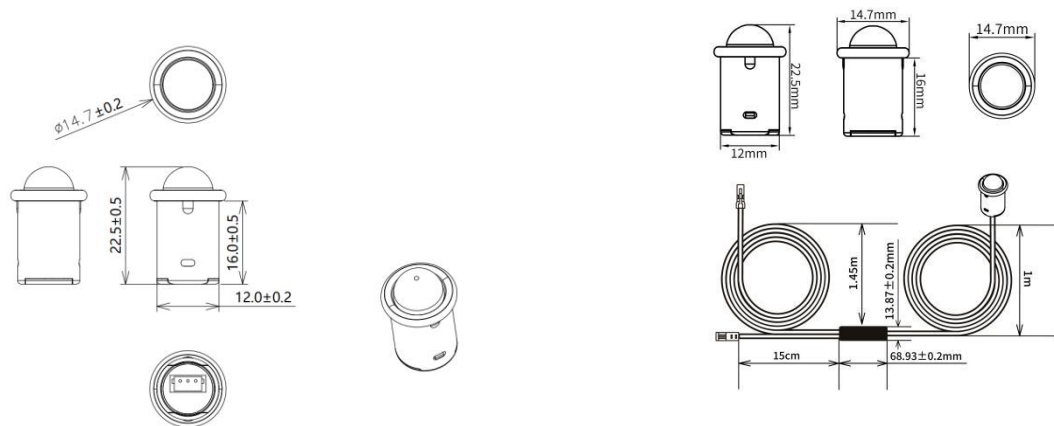

Schematic Diagram

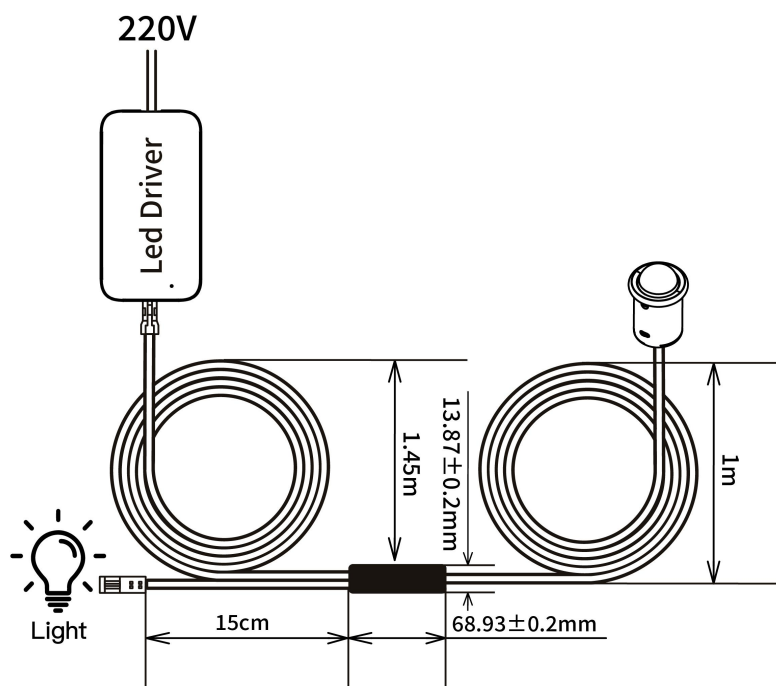

Product information	
1. Product Category	☒ wired ☐ wireless ☐ other
2. Installation Method	☒ Hidden installation ☒ Surface mount
3. Mounting Dimension	Hidden installation: Hole Size Ø12mm, Hole Depth 18mm.
4. Product Name	PIR Sensor Switch
5. Cable Length	1000mm + 1450mm
6. Function Description	When people come, the lights will be turned on. When people is gone, the lights will be turned off.
7. Control Mode	Channel control
8. Sensing Distance	0 - 4 meters
9. Sensing Angle	0-120°
10. Operating Voltage	12-24V
11. Operating Current	Channel control : 3A Max
12. Operating Temperature	-10℃-40℃
13. Operating Humidity	0%-85%RH
14. Shell Material	ABS
15. Warranty Period	3 years
16. Product Dimensions	14.7*14.7*22.5mm
17. Accessory	1pcs*base +2pcs*screws