


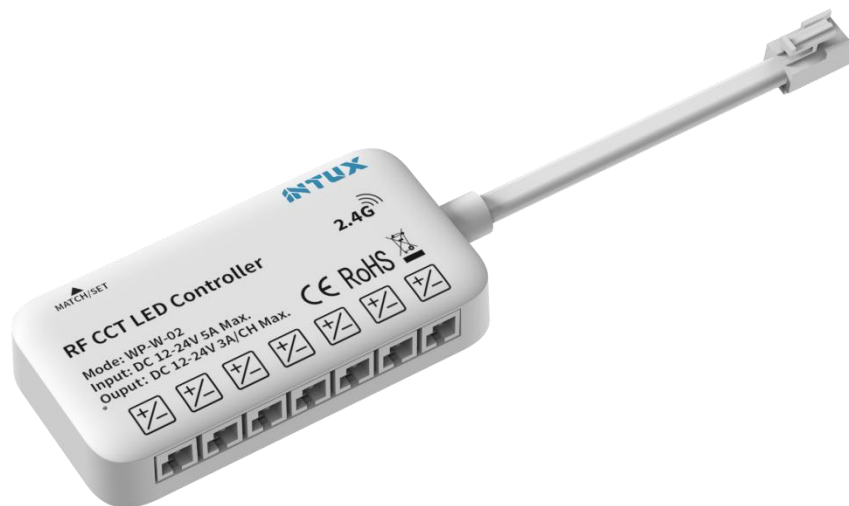


User Manual

For **Power Splitter Controller - RF2.4G Wireless Smart Power Splitter**

- **2pin Dual Color**

Product Range: **WP-W-02**

Dimension Diagram unit: mm

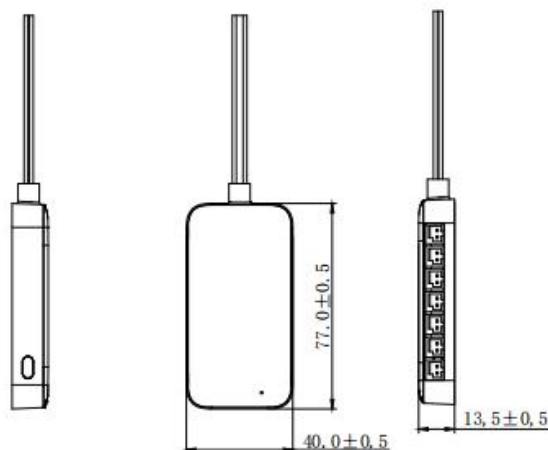

Product information		
1. Product Name	RF2.4G Wireless Smart Power Splitter - 2pin Dual Color	
2. Function Description	This product integrates the functionality of a wireless sensor receiver while simultaneously enabling synchronous control of multiple lighting fixtures, achieving a dual-purpose combination of a receiver and a splitter.	
3. Pairing Mode	Pairing mode 1: After the splitter is powered on, and the red indicator light is on for 20 seconds.	Pairing mode 2: Hold down the splitter pair button for 5s when the power is on, and the red indicator will keep on for 20s.
	Clear pairing mode: Short press 3 times quickly, the indicator flashes 3 times quickly, and the lighting fixture flashes 3 times synchronously (indicating that all transmitter code values are cleared)	
4. Input Parameter	DC 12-24V 5A Max.	
5. Output Parameter	DC12-24V 3A Max. (Channel)	
6. Input Wire Specification	18wag & 180mm & VH3.96-2P	
7. Output Terminal Type	Female DuPont 2.54	
8. Operating Temperature	-10°C-40°C	
9. Operating Humidity	0%-85%RH	
10. Shell Material	ABS+PC	
11. Warranty Period	3 years	
12. Product Dimensions	77.7*40*13.5mm	